

Makita[®]

CORDLESS MAINTENANCE FOR

HEAVY DUTY MACHINERY

Product Range

2026/27





Mechanical & Specialized Systems

For lubricating mechanical components and servicing specialized air systems.

Cleaning & Surface Prep

Essential for clearing grime, mud, and dirt before maintenance.

Lighting

A complete system of portable lights for optimal visibility in any situation.

Transport

Introducing the next generation in modular storage systems



Narrow Spaces & Utility

Designed for accessing and fastening bolts in confined, hard-to-reach areas.

Undercarriage & Chassis

High-torque impact wrenches for loosening and tightening large bolts on tracks, sprockets, and chassis



Attachments

For material removal on hydraulic components and attachments.




Body & Frame

Tools for general-purpose fastening, cutting, and shaping on the machine's exterior.


Cab & Interior

For general cleaning and maintenance of the operator's cab and interior.

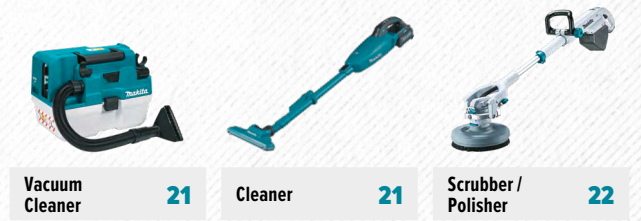

Engine Bay

Essential for fastening, light cleaning, and repairs in the engine compartment.

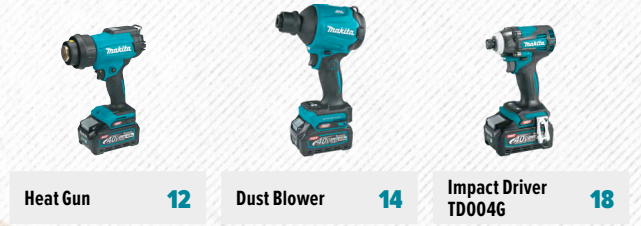

Trucks & Trailers

Fastening & Disassembly

Used for wheel changes, chassis, suspension, and brake service. Provides power for loosening large bolts and nuts on heavy-duty components.

TW009G / TW010G	8
TW001G / TW011G	9
DTL300	11
DWR180	11
TD004G	18

Lubrication & Fluids

Ensures proper greasing of joints, fifth-wheel couplings, and hydraulic fittings. Also used for air pressure checks and fluid servicing.

GP001G	12
DVP181	13
MP001G	13

Frame, Structure & Body Work

For grinding, cutting, and general repair of truck frames, brackets, and body panels.

GA038G	16
GA005G	16
JR002G	15
GD001G	17

Cleaning & Maintenance

Used for cleaning filters, radiators, and engine bays, as well as maintaining cabins and undercarriage areas.

AS001G	14
UB001G	14
HW001G	23
CL001G	21

Lighting & Inspection

Portable lighting for underbody inspection, trailer checks, and night-time service work.

ML007G	26
ML012G / DML818	26
DML814	26



Truck & trailer maintenance essentials: TW010G, DTL300, GP001G, MP001G, GA005G, AS001G, UB001G, HW001G, DML814

Agricultural Machinery

Fastening & Disassembly

Used for drivetrain, wheel, and implement maintenance. Handles high-torque bolts on axles, joints, and frame connections.

TW009G / TW010G	8
TW001G / TW011G	9
TW007G	10
DTL300	11
DWR180	11
TD004G	18

Lubrication & Fluids

Essential for greasing pivot points, PTO shafts, and hydraulic couplers. Also supports tyre and air system maintenance.

GP001G	12
DVP181	13
MP001G	13

Frame, Structure & Body Work

For sharpening, repairing, or fabricating parts of frames, loader arms, and attachments.

TW007G	10
HM001G	15
JR002G	15
GA038G / GA005G	16
GD001G	17
DBS180	17

Cleaning & Maintenance

Cleans radiators, filters, cabins, and engine compartments after fieldwork to prevent overheating and wear.

AS001G	14
UB001G	14
HW001G	23
CL001G	21

Lighting & Inspection

Provides illumination for field service, barn repairs, and night-time machinery checks.

ML007G	26
ML012G / DML818	26
DML814	26



Agricultural maintenance essentials: TW010G, TW007G, TW001G, GP001G, HM001G, GA005G, AS001G, HW001G, DML814

Tabless Technology
High Output Batteries



Check video



Check video

35% MORE POWER

31% COOLER RUNNING

Battery Cell Comparison


THE POWER OF INNOVATION

TABLESS CELL DESIGN

Stronger, Smarter and Cooler

Without traditional tabs, current flows through multiple paths, reducing resistance and heat. The result — powerful, consistent performance.

- ▶ Shorter current path for efficient energy flow
- ▶ Runs cooler under continuous load
- ▶ Up to 35% more power for high-demand applications
- ▶ Designed for sustained performance in demanding use

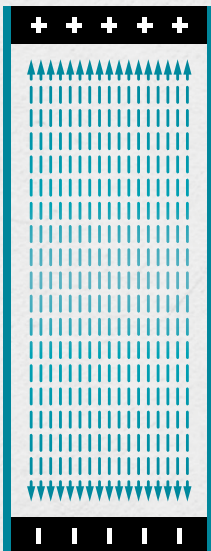


TABBED CELL DESIGN

Balanced Power


The established cell layout provides stable output and wide tool compatibility, delivering dependable performance across diverse tasks.

- ▶ Traditional structure with steady energy delivery
- ▶ Optimised for versatile, all-around applications
- ▶ Compatible with the entire XGT range
- ▶ Reliable power for everyday and intensive use

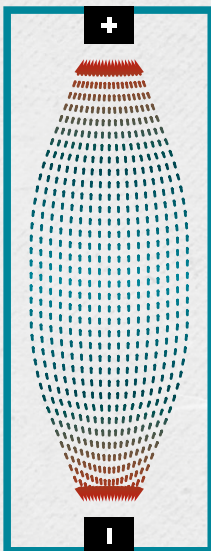

40V Max - XGT Batteries and Chargers

Maximum Power

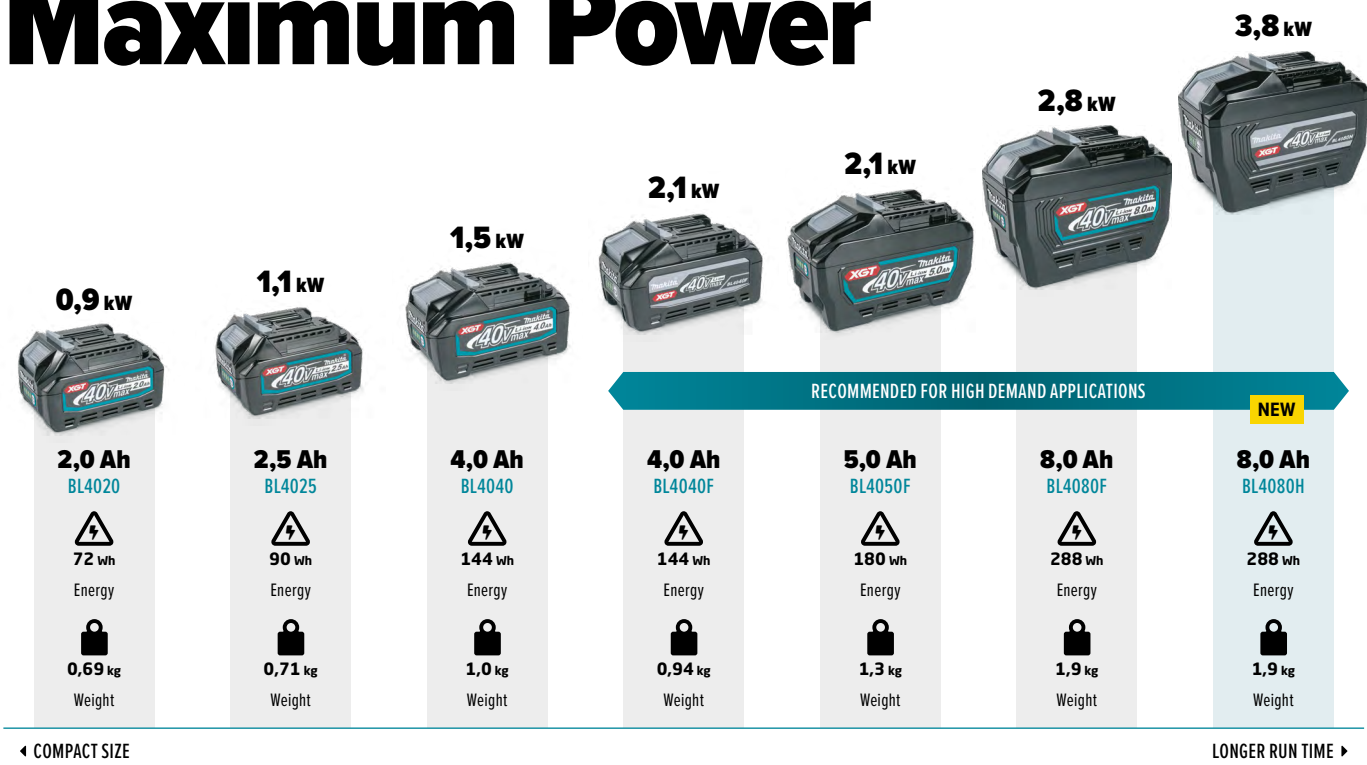

XGT DC40RA
40V Max - XGT Rapid Charger

6 - 12 A Charging Current, 250 W Power, Rapid Charging, 2 x Cooling Fan

- Built-in chip optimizes charging by controlling current, voltage, and temperature in real time
- Two cooling fans which cool the battery and charging circuit for faster charging
- With ADP10 adapter, supports rapid charging of LXT 18 V batteries

Charging times for one battery	
BL4020 / 2,0 Ah	22 min
BL4025 / 2,5 Ah	28 min
BL4040 or BL4040F / 4,0 Ah	45 min
BL4050F / 5,0 Ah	50 min
BL4080F or BL4080H / 8,0 Ah	76 min

XGT DC40RB
40V Max - XGT Dual Rapid Charger

6 - 12 A Charging Current, 250 W Power, Rapid Charging, 3 x Cooling Fan

- Built-in chip optimizes charging by controlling current, voltage, and temperature in real time
- Three cooling fans which cool the battery and charging circuit for faster charging
- With ADP10 adapter, supports rapid charging of LXT 18 V batteries

Simultaneous charging times for two batteries	
BL4020 / 2,0 Ah	22 min
BL4025 / 2,5 Ah	28 min
BL4040 or BL4040F / 4,0 Ah	45 min
BL4050F / 5,0 Ah	50 min
BL4080F or BL4080H / 8,0 Ah	76 min

XGT DC40RC
40V Max - XGT Charger

4 A Charging Current, 170 W Power, Charging, 1 x Cooling Fan

- Built-in chip optimizes charging by controlling current, voltage, and temperature in real time
- With cooling fan which circulates the air through the battery for faster charging
- With ADP10 adapter, supports rapid charging of LXT 18 V batteries

Charging times for one battery	
BL4020 / 2,0 Ah	30 min
BL4025 / 2,5 Ah	38 min
BL4040 or BL4040F / 4,0 Ah	67 min
BL4050F / 5,0 Ah	85 min
BL4080F or BL4080H / 8,0 Ah	170 min

XGT DC40WA
40V Max - XGT Dual Charger


1,1 A Charging Current, 79,2 W Power, Charging

- Can be mounted on the wall
- LED charging / error indicator

Simultaneous charging times for two batteries	
BL4020 / 2,0 Ah	110 min
BL4025 / 2,5 Ah	130 min
BL4040 or BL4040F / 4,0 Ah	210 min
BL4050F / 5,0 Ah	260 min
BL4080F or BL4080H / 8,0 Ah	420 min

18 V - LXT Batteries and Chargers

Extended Runtime

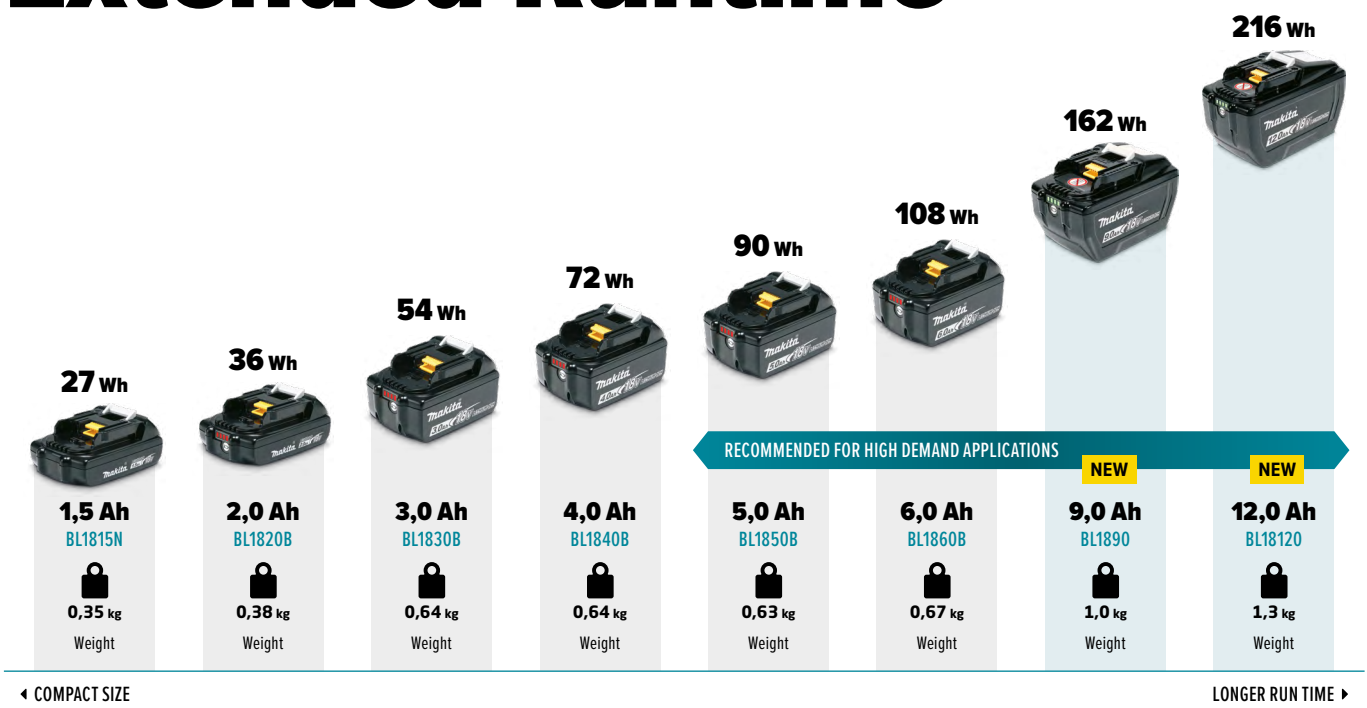

LXT DC18RC
18V - LXT Rapid Charger

9 A Charging Current, 190 W Power, Rapid Charging, 1 x Cooling Fan

- Communicates with battery chip to optimize charging and extend battery life
- With cooling fan which circulates the air through the battery for faster charging

Charging times for one battery	
BL1815N / 1,5 Ah	15 min
BL1820B / 2,0 Ah	24 min
BL1830B / 3,0 Ah	22 min
BL1840B / 4,0 Ah	36 min
BL1850B / 5,0 Ah	45 min
BL1860B / 6,0 Ah	55 min
BL1890 / 9,0 Ah	85 min
BL18120 / 12,0 Ah	120 min

LXT DC18RD
18V - LXT Dual Rapid Charger

9 A Charging Current, 190 W Power, Rapid Charging, 2 x Cooling Fan

- Communicates with battery chip to optimize charging and extend battery life
- Two cooling fans which cool the battery and charging circuit for faster charging

Simultaneous charging times for two batteries	
BL1815N / 1,5 Ah	15 min
BL1820B / 2,0 Ah	24 min
BL1830B / 3,0 Ah	22 min
BL1840B / 4,0 Ah	36 min
BL1850B / 5,0 Ah	45 min
BL1860B / 6,0 Ah	55 min
BL1890 / 9,0 Ah	85 min
BL18120 / 12,0 Ah	120 min

LXT DC18SD
18V - LXT Charger

2,6 A Charging Current, 55 W Power, Charging

- Communicates with battery chip to optimize charging and extend battery life

Charging times for one battery	
BL1815N / 1,5 Ah	30 min
BL1820B / 2,0 Ah	45 min
BL1830B / 3,0 Ah	60 min
BL1840B / 4,0 Ah	90 min
BL1850B / 5,0 Ah	110 min
BL1860B / 6,0 Ah	130 min
BL1890 / 9,0 Ah	200 min
BL18120 / 12,0 Ah	270 min

LXT DC18SH
18V - LXT Dual Charger

2,6 A Charging Current, 55 W Power, Charging

- Communicates with battery chip to optimize charging and extend battery life

Simultaneous charging times for two batteries	
BL1815N / 1,5 Ah	30 min
BL1820B / 2,0 Ah	45 min
BL1830B / 3,0 Ah	60 min
BL1840B / 4,0 Ah	90 min
BL1850B / 5,0 Ah	110 min
BL1860B / 6,0 Ah	130 min
BL1890 / 9,0 Ah	200 min
BL18120 / 12,0 Ah	270 min

Accessories for 1" Impact Wrenches



E-24511
27 mm impact socket with O ring and Pin



E-24533
32 mm impact socket with O ring and Pin



E-24561
36 mm impact socket with O ring and Pin



E-24608
42 mm impact socket with O ring and Pin



E-24701
32 mm deep impact socket with O ring and Pin



E-24739
36 mm deep impact socket with O ring and Pin



E-24773
46 mm deep impact socket with O ring and Pin



XGT
TW010G

40V Max - XGT Impact Wrench 1"



Square Drive



Fastening



Nut-busting



Auto-stop Modes



Speed Settings

- ▶ 1" long anvil with friction ring and thru hole retention system for maximum productivity
- ▶ 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- ▶ The handle can be rotated 360° (increments of 45°) and tilted back and forth in 9 steps

TW010GZ01 without batteries and charger



Check video



XGT
TW009G

40V Max - XGT Impact Wrench 1"



Square Drive



Fastening



Nut-busting



Auto-stop Modes



Speed Settings

- ▶ 1" anvil with friction ring and thru hole retention system for maximum productivity
- ▶ 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- ▶ The handle can be rotated 360° (increments of 45°) and tilted back and forth in 9 steps

TW009G01 without batteries and charger



Check video



XGT
TW011G

40V Max - XGT Impact Wrench 3/4"



Square Drive



Fastening



Nut-busting



Auto-stop Modes



Speed Settings

- ▶ 3/4" long anvil with friction ring and thru hole retention system for maximum productivity
- ▶ 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- ▶ XPT™ is engineered to provide increased dust and water resistance in harsh job site conditions

TW011GZ01 without batteries and charger



XGT
TW001G

40V Max - XGT Impact Wrench 3/4"



Square Drive



Fastening



Nut-busting



Auto-stop Modes



Speed Settings

- ▶ 3/4" anvil with friction ring and thru hole retention system for maximum productivity
- ▶ 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- ▶ XPT™ is engineered to provide increased dust and water resistance in harsh job site conditions

TW001GZ01 without batteries and charger

Accessories for 3/4" Impact Wrenches



E-22280
27 mm impact socket with O ring and pin



E-22305
32 mm impact socket with O ring and pin



E-22377
30 mm deep impact socket with O ring and pin



E-22399
32 mm deep impact socket with O ring and pin



191G67-2
Extension handle



Its robust performance makes it ideal for tackling heavy-duty tasks effortlessly, whether it's loosening stubborn nuts or tightening bolts with precision. This wrench ensures efficiency and reliability, promising to be a valuable tool in any demanding mechanical or industrial setting.



The 3/4" cordless impact wrench, boasting an impressive 2.050 Nm of torque, plays a crucial role in heavy-duty machine maintenance. It excels at efficiently loosening and tightening large bolts and heavy-duty fasteners, making it an indispensable tool for tasks involving construction equipment, agriculture machinery and industrial vehicles.

Accessories for 1/2" Impact Wrenches



E-12354
1/2" impact deep sockets for wheel nut with O ring and pin: 17, 19 and 21



B-55706
1/2" impact socket extension bar: 250 mm



B-68448
1/2" adapter for 1/4" Hex bits



XGT
TW007G

40V Max - XGT Impact Wrench 1/2"



- ▶ Equipped with a 1/2" C-ring
- ▶ Compact design with a short overall length of 170 mm
- ▶ 3 forward and 3 reverse Auto-Stop modes for increased efficiency

TW007GZ01 without batteries and charger



XGT
TW004G

40V Max - XGT Impact Wrench 1/2"



- ▶ Equipped with a 1/2" C-ring
- ▶ 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- ▶ Compact length at only 144 mm; ideal for working in tight spaces

TW004GZ01 without batteries and charger



LXT
DTL300

18V - LXT Angle Impact Wrench 1/2"




- ▶ 1/2" anvil with friction ring and thru hole retention system for maximum productivity
- ▶ 3 forward and 3 reverse Auto-Stop modes for increased efficiency
- ▶ Ideal for working in tight spaces and overhead applications

DTL300Z without batteries and charger



LXT
DWR180

18V - LXT Ratchet Wrench 3/8" / 1/4"



- ▶ Interchangeable 3/8" and 1/4" anvils for added versatility
- ▶ Ideal for working in tight spaces and overhead applications
- ▶ Can be used as manual ratchet when motor is not engaged


DWR180Z without batteries and charger



191A50-3
3/8" socket adapter



191A51-1
1/4" socket adapter

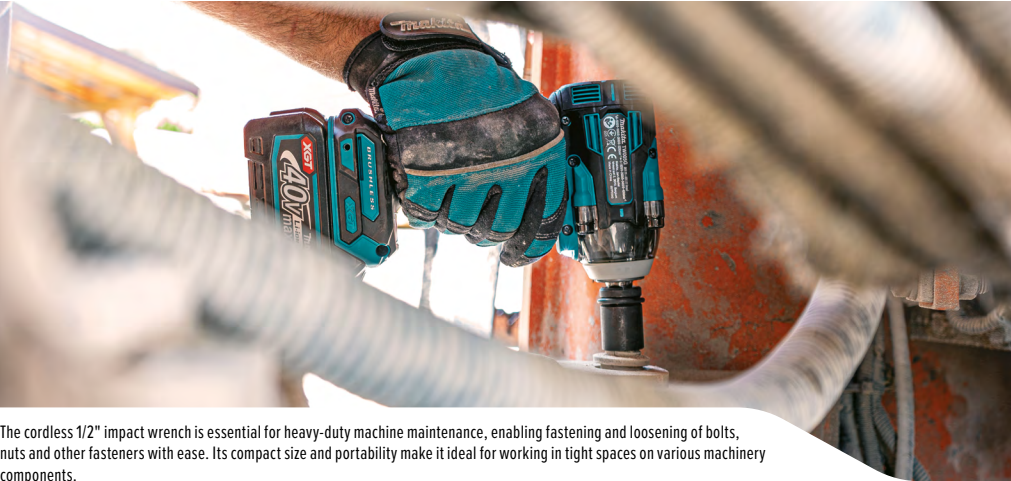

The cordless 1/2" impact wrench is essential for heavy-duty machine maintenance, enabling fastening and loosening of bolts, nuts and other fasteners with ease. Its compact size and portability make it ideal for working in tight spaces on various machinery components.

LXT Range



DTW1001
18V - LXT Impact Wrench
1.050 Nm, 3/4"



DTW701
18V - LXT Impact Wrench
700 Nm, 1/2"



DTW301
18V - LXT Impact Wrench
330 Nm, 1/2"



The cordless tools are designed for work in tight and hard-to-reach spaces, enabling fast and efficient fastening and loosening. Thanks to their compact design, they are ideal for servicing heavy-duty machinery, especially during maintenance tasks where access is limited but reliability and precision are essential



Accessories for Grease Guns

1916S5-1
Flexible hose with coupler - 1.200 mm

1911M9-1
Extension pipe for flexible hose

191W60-2
3 grease coupler set

1915E6-5
Joint for connecting a 500 g grease cartridge to the tool

Accessories for Heat Guns

PR00000029
Wide-slot nozzle

PR00000030
Reflector nozzle

PR00000032
Overlap welding nozzle

PR00000034
Welding nozzle



XGT
GP001G

40V Max - XGT Grease Gun

350 ml/min	69 MPa	455 g	1,2 m	
Flow Rate	Pressure	Bulk Grease Capacity	Hose Length	Air Bleed Valve

- Features four speed modes—145, 220, 290 and 350 ml/min—with a variable speed trigger for enhanced control
- Air bleed valve assists in faster pump priming
- Lock-on button for easier and more consistent grease delivery during extended operation

GP001GZ without batteries and charger

XGT
HG001G

40V Max - XGT Heat Gun

600 °C	+10 °C	180 l/min		
Air Temperature	Temperature Adjustment	Air Flow	Speed Dial	Quick Release

- Temperature adjustable from ambient to 600 °C in 10 °C increments
- Adjustable airflow settings: 70, 100, 140, 180 l/min
- LCD display shows temperature (°C/°F), airflow, battery level and error alerts – all with memory function

HG001GZ02 without batteries and charger



The cordless grease gun is essential for heavy-duty machine maintenance, enabling efficient lubrication of critical components for smooth operation and long service life. The cordless heat gun supports safe and precise heating for cable repairs and heat-shrink applications in confined engine compartments.

LXT Range



DGP180
18V - LXT Grease Gun
290/145 ml/min, 69 MPa



DHG181
18V - LXT Heat Gun
550/450/350/250/150 °C, 200/120 L/min



Check video



XGT
MP001G

40V Max - XGT High Pressure Inflator

11,1 bar			65 cm	
Air Pressure	Inflation Modes	Air Release Button	Hose Length	LED Job Light

- Air release button allows pressure to be released if over inflation occurs
- Auto-stop function automatically stops inflation when preset air pressure is reached to prevent overfill
- Three speed settings (High/Medium/Low)

MP001GZ02 without batteries and charger



The cordless high-pressure inflator is essential for heavy-duty machine maintenance, enabling fast and accurate inflation of tyres and pressure systems on site. The cordless vacuum pump supports reliable servicing of HVAC systems by efficiently removing air and moisture to ensure correct system operation and long-term performance

LXT Range



DMP181
18V - LXT High Pressure Inflator
11/7/2 bar



DMP180
18V - LXT High Pressure Inflator
8/7/2 bar



DVP180
18V - LXT Vacuum Pump
20 Pa, 50 L/min



LXT
DVP181

18V - LXT Vacuum Pump

4 CFM	3 Pa	113 l/min		300 ml
Vacuum Class	Vacuum	Flow Rate	Drain Port	Oil Tank Capacity

- Powerful dual-stage compression for efficient evacuation of large HVAC systems in heavy-duty equipment
- Built-in electromagnetic check valve prevents backflow, ensuring safe and reliable operation even during sudden shutdowns
- Ideal for purging air during maintenance of large-scale air conditioning and refrigeration units

DVP181ZK with plastic case and without batteries and charger

Accessories for Inflators



TE00000691
Air pump adapter with 30° head angle



TE00000796
Air pump adapter with 0° head angle

Accessories for Vacuum Pumps



AS0VP051MK
Intake shut-off valve with gauge



AS00XP808M
Vacuum gauge



AS0A1154MK
Vacuum hose



AS00VP050M
Vacuum pump oil



AS0Y06110K
Adapter

Accessories for Dust Blowers



191X13-7
ø 7 mm nozzle for cleaning filters



191X15-3
ø 13 mm nozzle for blowing



191X19-5
Wide angle nozzle



191X78-9
Nozzles for blowing in narrow space



191X21-8
Flexible hose nozzle



191X29-2
Filter assembly

Accessories for Blower / Vacuum



123241-2
Dust bag



Check video



XGT
AS001G

40V Max - XGT Dust Blower

200 m/s	1,1 m³/min	2,8 N	4	
Air Velocity	Air Volume	Blowing Force	Variable Speed	Quick Release

- ▶ 4 digitally controlled speeds for a wide range of applications
- ▶ 5 nozzles included for a wide range of applications
- ▶ Filter on blower intake reduces dust being blown through the blower

AS001GZ05 without batteries and charger



Check video



XGT
UB002G

40V Max - XGT Blower / Vacuum

99 m/s	3,6 m³/min	3,1 N	x6	5,4 kPa
Air Velocity	Air Volume	Blowing Force	No. of Speeds	Suction

- ▶ Switch with variable speed control and 3-stage speed control
- ▶ With long garden nozzle and short standard nozzle
- ▶ Convenient vacuum function by moving the nozzle to the suction inlet and attaching an optional dust bag (123241-2)

UB002GZ01 without batteries and charger



Check video



XGT
JR002G

40V Max - XGT Reciprocating Saw

32 mm	255 mm	130 mm	7	6
Stroke Length	Cutting in Wood	Cutting in Steel	Cutting Functions	Speed Dial

- ▶ Delivers the power of a 1.800 W corded reciprocating saw
- ▶ On/Off orbital feature provides more aggressive cuts
- ▶ Refined crank mechanism design minimizes blade deflection and reduces vibration

JR002GZ without batteries and charger



Check video



XGT
HM001G

40V Max - XGT Demolition Hammer

SDS-Max	9,4 J	12	6	
Shank Type	Impact Energy	Angle Bit Setting	Speed Dial	Constant Speed

- ▶ Adapted for SDS-MAX bits
- ▶ Constant speed control automatically applies additional power under load for optimum performance
- ▶ Dust extraction capability with optional Makita Dust Attachment Kit

HM001GZ02 without batteries and charger

Accessories for Reciprocating Saws



B-55594
305 mm reciprosaw blade with tungsten carbide tip for metal, mild steel, cast iron and stainless steel



B-63585
305 mm reciprosaw blade with tungsten carbide tip for aerated concrete and epoxy



B-10403
455 mm reciprosaw blade with tungsten carbide tip for aerated concrete



Use a cordless dust blower to clean air filters and remove debris from engine compartments, cooling systems, electrical panels and hard-to-reach areas on heavy-duty machinery.

LXT Range




DAS180
18V - LXT Dust Blower
200 m/s, 2,8 N



DUB362
18V + 18V - LXT Blower
54 m/s, 14,4 N



DUB184
18V - LXT Blower
52,1 m/s, 10,9 N

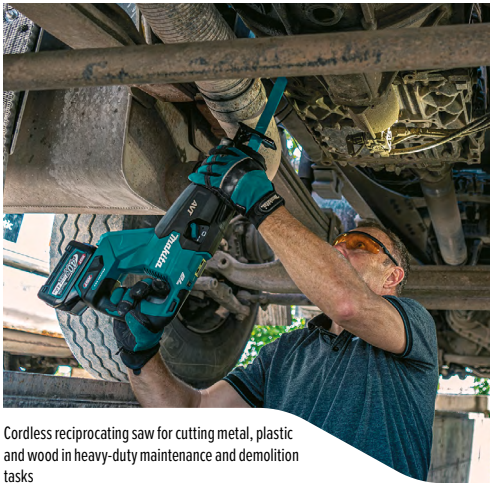

Cordless reciprocating saw for cutting metal, plastic and wood in heavy-duty maintenance and demolition tasks

LXT Range



DJR360
18 + 18 V - LXT Reciprocating Saw
32 mm, 255/130 mm



DHK180
18V - LXT Demolition Hammer
3,1 J, SDS-Plus



Versatile cordless demolition hammer for heavy-duty maintenance, like cleaning grousers, blades and buckets.

Accessories for
Angle Grinders



B-55326
230 mm diamond wheel for multi material:
steel, stainless steel, nonferrous metal,
PVC, concrete, glass



B-55310
125 mm diamond wheel for multi material:
steel, stainless steel, nonferrous metal,
PVC, concrete, glass



B-29022
125 mm fibreglass strip disc for cleaning
without removing any material or
weakening the workpiece.




Check
video



XGT
GA038G

BL **AFT** **AWS**

40V Max - XGT Angle Grinder 230 mm




- ▶ Automatic-start Wireless System (AWS®) for wireless power-on/off communication between tool and dust extractor (AWS® Transmitter sold separately)
- ▶ Anti-restart protection engineered to prevent motor start up when battery is inserted with switch locked on
- ▶ Paddle switch with no lock-on for operator convenience

GA038GZ07 without batteries and charger

XGT
GA005G

BL **AFT**

40V Max - XGT Angle Grinder 125 mm



- ▶ Active Feedback-sensing Technology (AFT®) turns the motor off if rotation of the wheel is suddenly forced to stop
- ▶ Anti-restart protection engineered to prevent motor start up when battery is inserted with switch locked on
- ▶ Slide switch with lock-on for operator convenience

GA005GZ01 without batteries and charger



The cordless angle grinder is a versatile tool for heavy-duty machine maintenance. It can cut metal, grind, polish and remove rust or corrosion, making it essential for various maintenance applications.

LXT Range



DGA900
18V + 18V - LXT Angle Grinder
230 mm, 6.600 min⁻¹



DGA504
18V - LXT Angle Grinder
125 mm, 8.500 min⁻¹



DMC300
18V - LXT Compact Cut-off
76 mm, 20.000 min⁻¹



Check
video



XGT
GD001G

BL **AFT**

40V Max - XGT Die Grinder



- ▶ Compact barrel grip design and low weight for easy handling
- ▶ Vent slots designed to direct exhaust air away from the user
- ▶ Stepped neck for working in tight spaces
- ▶ Slide switch with lock-on and speed dial for operator convenience

GD001GZ01 without batteries and charger



A die grinder is vital in machinery maintenance, used to smooth welds, remove rust, and prep surfaces. Its compact, high-speed design is ideal for tight spaces and detailed work.

LXT Range



DGD800
18V - LXT Die Grinder
6 mm, 26.000 min⁻¹

Accessories for
Die Grinders



B-52722
ø 10 x 20 mm, diamond-cut bit for removing
burrs on metal and stainless steel




B-52750
ø 10 x 20 mm, diamond-cut bit for removing
burrs on metal, stainless steel and aluminum



B-52788
ø 10 x 20 mm, diamond-cut bit for
removing burrs on aluminum.



B-52819
ø 10 x 25 mm, diamond-cut bit for cleaning
weld seams between steel plates,
suitable for metal and stainless steel



B-36918
ø 50,8 x 38,1 mm – 40 grit flap wheel,



B-36974
ø 50,8 x 50,8 mm – 60 grit flap wheel

Accessories for
Belt Sander




Sanding Belt 9 x 533 mm
P-43256 – 40 grit
P-43262 – 60 grit
P-43278 – 80 grit
P-43284 – 100 grit
P-43290 – 120 grit



LXT
DBS180

BL **AFT**

18V - LXT Belt Sander



- ▶ L.E.D. light adjusts to match the angle of the sanding arm or the shape of the workspace
- ▶ Versatile for both wood and metal applications
- ▶ Variable speed control dial (600 – 1.700 m/min) to match speed to the application
- ▶ Two optional arm assemblies (6 mm and 13 mm) available for increased versatility

DBS180Z without batteries and charger



Perfect for servicing heavy duty equipment, the 9 mm belt sander delivers powerful material removal in hard-to-reach areas. Ideal for cleaning welds, removing rust, and prepping narrow surfaces.

Accessories for Combi Drills & Impact Drivers



E-07032
27-piece drilling and fastening set: includes HSS-TiN metal bits, masonry bits and wood bits — all ø 3–10 mm. Also includes 25 mm screwdriver bits (PH, SL, PZ, H, T) with 60 mm bit holder



Torsion Screw Bit
Impact premier – PH (1/2/3), PZ (1/2/3), T (10/15/20/25/30/40)



Double Ended Torsion Screw Bit
Impact premier – PH2, PZ2



Tilt Socket Adapter
Impact premier – 1/2" and 3/8" drive



Torsion Bit Holder
Impact premier – 68/150 mm



Ultra Mag Torsion Bit Holder
Impact premier – 79 mm



Torsion Nutsetter
Impact premier – 6/8/10/13 mm



Tilt Socket Bit
Impact premier – 13/15/17/19/21 mm



XGT
HP003G
40V Max - XGT Combi Drill



ø 40 mm
Capacity Wood



ø 13 mm
Capacity Metal



150/88 Nm
Fastening Torque



3
No. of Speeds



1,5 - 13 mm
Chuck Capacity

- ▶ Active Feedback sensing Technology (AFT) stops the engine if the rotation suddenly stops
- ▶ Keyless chuck for easy bit installation and removal
- ▶ 2 speed settings 0 - 550/2,200 min⁻¹

HP003GZ01 without batteries and charger



XGT
TD004G
40V Max - XGT Impact Driver



230 Nm
Fastening Torque



4
No. of Speeds



T-mode (thin metal)



Quick Bit Installation



LED Job Light

- ▶ 4-stage impact power and T-Mode (for thin metal) to minimize screw stripping when a self-drilling screw is tightened into a thin metal sheet workpiece under light load.
- ▶ Compact length at only 136 mm ideal for working in tight spaces
- ▶ Equipped with an electric brake and anti-restart function for safe operation

TD004GZ01 without batteries and charger



LXT
DRV250
18V - LXT Rivet Gun



ø 6,4 mm
Rivet Diameter



20.000 N
Pulling Force



30 mm
Stroke



Mandrel Container



LED Job Light

- ▶ Installs rivets from 2,4 to 6,4 mm
- ▶ 30 mm stroke sets most rivets in one stroke
- ▶ Tool holds rivet in place, allowing operation in any orientation
- ▶ Suitable for aluminium, steel, and stainless steel rivets
- ▶ Transparent mandrel catch container for easy viewing of fill level

DRV250Z without batteries and charger



LXT
DCG180
18V - LXT Caulking Gun



0 - 28 mm/s
Dispensing Speed



5.000 N
Dispensing Force



360°
Rotatable Cartridge




Speed Dial



Drip Stop

- ▶ 5 speed dial optimizes flow rate from 0 - 28 mm/sec.
- ▶ Drip-reduction feature automatically relieves pressure on the material when trigger is released to prevent unintentional dispensing
- ▶ Overload indicator light notifies the operator when tool is nearly overloaded to minimize breakage of the sealant cartridge

DCG180ZBK without batteries and charger

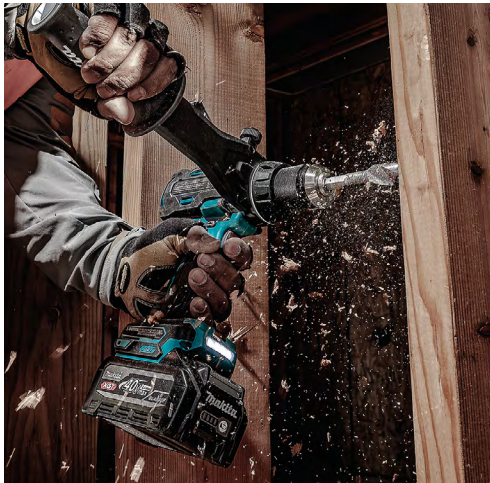

Ideal for securing panels, fenders, and guards on heavy-duty machinery. Rivets offer a strong, reliable bond that resists vibration and harsh conditions.



A caulking gun applies sealants and adhesives cleanly and efficiently, sealing panels, windows, and enclosures against water and dirt while also cushioning components to reduce vibration and noise.

Accessories for Rivet Guns



199730-9
Jaws – 6,4 mm



Nose Piece, Jaw Pusher and Pipe Set
191F80-4 – 4,0 mm
191F78-1 – 6,4 mm



191D57-7
Molybdenum Disulfide Grease – 5 g

Accessories for Caulking Gun



196351-8
300 ml cartridge holder



191P89-6
400 ml cartridge style, sausage style and bulk caulks and adhesives



1911T4-0
600 ml cartridge style, sausage style and bulk caulks and adhesives

Accessories for
Random Orbit Sander
and Orbital Sander



Net Type Abrasive Disc
Ø 150 mm

Exceptional dust extraction and consistent finish — ideal for high-performance sanding. *Use with a pad saver for maximum durability:

- D-78710 – 80 grit (10/1)
- D-78726 – 120 grit (10/1)
- D-78732 – 180 grit (10/1)
- D-78748 – 240 grit (10/1)
- D-78754 – 320 grit (10/1)



Net Type Abrasive Delta Paper
100 x 150 mm

Exceptional dust extraction and consistent finish — ideal for high-performance sanding. *Use with a pad saver for maximum durability:

- D-78900 – 120 grit (10/1)
- D-78916 – 180 grit (10/1)
- D-78922 – 240 grit (10/1)
- D-78938 – 320 grit (10/1)



D-78760

Pad saver Ø 150 mm (2/1)



D-78944

Delta pad saver 100 x 150 mm (2/1)



1914H8-6

Comfortable backpack for carrying the battery with effortless mobility



Check video




Check video



B0002CG



40V Max - XGT Random Orbit Sander



- ▶ 5-speed variable speed control dial lets the operator match pad speed from 6,000 to 10,000 min⁻¹ to the application for smooth, refined finish sanding
- ▶ Ultra low profile design with superior ergonomics and up to 41% less vibration
- ▶ Smooth soft start with constant speed control is capable of handling demanding sanding applications


B0002CGZ without batteries and charger



B0006CG



40V Max - XGT Orbital Sander



- ▶ 5-speed variable speed control dial lets the operator match pad speed from 6,000 to 10,000 min⁻¹ to the application for smooth, refined finish sanding
- ▶ Ultra low profile design with superior ergonomics and up to 41% less vibration
- ▶ Smooth soft start with constant speed control is capable of handling demanding sanding applications

B0006CGZ without batteries and charger



Built for demanding industrial maintenance, these sanders combine robust performance with refined control. Whether smoothing weld seams or prepping metal surfaces, their low-vibration design, variable speed, and ergonomic form ensure precision, comfort and reliability — even in the toughest environments.



Check video



CL001G



40V Max - XGT Cleaner



- ▶ Capsule type cleaner for quick debris disposal
- ▶ 4-speed options for power and run time management
- ▶ L.E.D. light for improved visibility and also functions as low battery charge indicator
- ▶ Compact and ergonomic design for operator comfort

CL001GZ04 without batteries and charger



Compact, portable vacuum cleaners are ideal for maintaining your equipment clean for reliable and safer operation.

LXT Range



DCL184
18V - LXT Cleaner
5,4 kPa, 38 W, 500/330 ml



Check video



VC013GL



40V Max - XGT Portable Vacuum Cleaner



- ▶ Filter cleaning system is designed to maintain optimum suction power and longer filter life
- ▶ On-board hose and nozzle storage allow for easy and convenient transport
- ▶ Two tools in one; quickly converts from vacuum to blower for increased versatility

VC013GLZ01 with AWS system, without batteries and chargers



DVC750L
18V - LXT Portable Vacuum Cleaner
6,7 kPa, 50 W, 7,5/4,5 L

Accessories for
Cleaners



199966-0

Easy shake off filter



1914X6-2


HEPA filter

Accessories for Portable
Vacuum Cleaners



1915T4-4

Filter set for wet vacuuming



195432-5

High quality poly dust bag – 45 l (10/1)



1915T3-6

Filter dust bag (10/1)



1915W5-3

Paper dust bag (10/1)



1915G5-1

4 caster wheels



199486-4

Shoulder belt

Accessories for
Scrubber / Polisher



1914T0-6
Soft brush for cleaning wooden floors



1914T1-4
Medium brush for cleaning general interior floors



1914T2-2
Hard brush for cleaning concrete floors and grease stains



1914T3-0
Hard abrasive brush for cleaning tiled floors



1914S4-1
Pad holder - hook and loop



1914S5-9
Fine floor pad for wax polishing



1914S6-7
Smooth floor pad for wax polishing



1914S7-5
Medium floor pad for wax cleaning



1914S8-3
Rough floor pad for wax removal



1914S9-1
Coarse floor pad for wax removal




Check video



XGT
PS001G

40V Max - XGT Scrubber / Polisher



- ▶ 3-speed selection (150/350/650 min⁻¹) allows the user to adjust the speed to the application for polishing, cleaning and wax removal
- ▶ Adjustable head with selectable fixed or free-moving operation
- ▶ Removable splash guard prevents water or cleaning agent from splashing during use
- ▶ Easy installation or removal of the brush or floor pad without direct contact

PS001GZ without batteries and charger



The polisher/scrubber is built for heavy-duty maintenance, ideal for cleaning large machines and surrounding floor surfaces. Its rugged design ensures reliable performance in demanding industrial settings.




Check video



XGT
VS001G

40V Max - XGT Vacuum Sweeper



- ▶ 3-brush design engineered for cleaning a variety of dust and waste materials
- ▶ Dual suction modes, Standard Mode for cleaning large amounts of dust and waste, and Quiet mode ideal for cleaning indoors and in smaller areas
- ▶ Side brush height adjustment dial with on/off lever
- ▶ Automatic self-cleaning filtration system maintaining optimal suction and longer filter life

VS001GZ without batteries and charger



Cordless vacuum sweeper ensures reliable performance even in demanding environments, combining HEPA filtration, two main brushes and a side brush, plus compact storage for effortless thorough cleaning.




Check video



XGT
HW001G

40V Max - XGT High Pressure Washer



- ▶ Adjustable pressure function with three modes
- ▶ Option to supply water from a tap or by pumping from a reservoir
- ▶ Two battery connections, with automatic switching to the second battery for longer operation
- ▶ Compact trolley design for easy portability and transport.

HW001GZ without batteries and charger



The high-pressure washer is perfect for heavy-duty machinery, delivering robust cleaning performance with the flexibility to supply water from a faucet or a separate water reservoir.

Accessories for High Pressure Washer



197842-2
Trigger gun



197828-6
Wash brush



1912Y4-1
Variospray nozzle



1912Y2-5
Foam nozzle with container



1912Y6-7
Variospray lance



126766-5 (5 m)
High pressure hose



197824-4
Cyclone jet nozzle



197845-6 (5 m)
197847-2 (8 m)
197850-3 (10 m)
High pressure hose extension



197864-2
Brush for upgrade cyclone jez nozzle



197837-5 (10 m)
197840-6 (15 m)
Drain & gutter hose



197870-7
Extension pipe (0,9 m/ 1,3 m/1,7 m)



197867-6
Anti twist adapter



197831-7
Rotary brush



1910R2-4
Hose with filter for the water supply from the tank
(use with hose 1910R1-6)



1910R1-6
Hose with quick couplings and non-return valve – 3 m



197873-1
Hose with filter for the water supply from the tank



197881-2
Absorption connector with filter



197883-8
Quick-coupling (non-return valve)



127104-4
Water tank 50 L

● Supplied ○ Optional



THE NEXT GENERATION IN MODULAR STORAGE SYSTEMS

Introducing the next generation in modular storage systems - Makita MAKTRAK. The smart storage solution of tool boxes and organisers with stackable design, easier access and improved loading/unloading into a truck bed or van.

MAKTRAK tool boxes keep your tools secure and easily accessible. Their dual hinged lids allow access from both sides, without unstacking the boxes, while the innovative horizontal design means they will accommodate larger tools like nailers, saws and rotary hammers.

MAKTRAK organisers are built to keep your workspace efficient and within reach. You can choose from deep medium, low profile medium and deep compact organisers, each designed with maximum durability and storage efficiency in mind.




Premium handle with Gecko Grips™ provides efficient truck/van loading and unloading.



Horizontal dual-hinged lid allows access to any case without unstacking or interference from the handle.



Horizontal design provides wider interior space for larger tools and accessories.

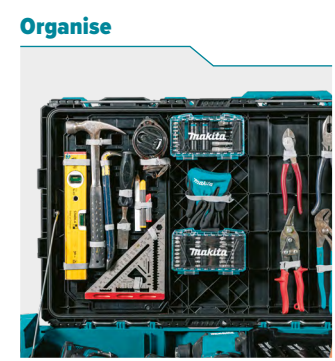


Customisable with lid mounting points, panel dividers, bins and battery/ charger storage trays.

BUILD YOUR OWN

MIX AND MATCH STACK AND STORE

MAKTRAK connection works in both directions, providing a strong and secure link while offering a quick disconnection via a lever.

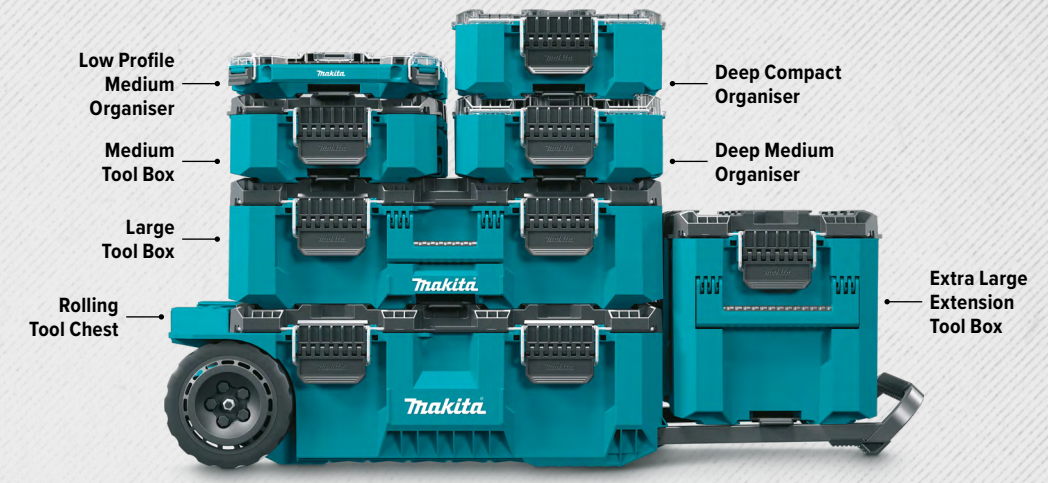

- P-91001**
Rolling Tool Chest - 81,9 L
- ▶ Spacious and robust design with dimensions of 1.011 × 565 × 295 mm
 - ▶ Max load capacity of 113 kg suitable for heavy-duty tools and equipment
 - ▶ Dual hinged lid allows convenient access from both sides
 - ▶ Secure latch locking system with padlock compatibility for added protection
 - ▶ Removable storage tray keeps small parts and tools organised
 - ▶ Durable handle extends up to 387 mm for easy transport
 - ▶ Heavy-duty construction with a weight of 17,44 kg for long-lasting use



- P-91017**
Large Tool Box - 63 L
- ▶ Compact and sturdy design with dimensions of 802 × 565 × 252 mm
 - ▶ Max load capacity of 45 kg suitable for medium-duty storage needs
 - ▶ Dual hinged lid offers easy access from either side
 - ▶ Secure latch locking system with option for padlock use
 - ▶ Large removable storage tray for organising tools and accessories
 - ▶ Built to last with a durable 10,11 kg construction



- P-91023**
Extra Large Extension Tool Box - 58,4 L
- ▶ Compact vertical design with dimensions of 394 × 565 × 402 mm
 - ▶ Max load capacity of 45 kg suitable for various storage applications
 - ▶ Dual hinged lid provides convenient top access
 - ▶ Secure latch locking system with padlock compatibility for added safety
 - ▶ Lightweight yet durable with a total weight of 7,21 kg



- P-91039**
Medium Tool Box - 18,4 L
- ▶ Low-profile and compact design with dimensions of 387 × 562 × 161 mm
 - ▶ Max load capacity of 34 kg ideal for smaller tools and components
 - ▶ Secure latch locking system with padlock compatibility for extra protection
 - ▶ Durable and lightweight build with a total weight of 4,45 kg



- P-91045**
Deep Medium Organiser - 18,4 L
- ▶ Compact design with dimensions of 387 × 562 × 163 mm
 - ▶ Max load capacity of 22,6 kg suitable for light to medium-duty storage
 - ▶ Clear lid for easy overview with ribbed design that secures bins in place
 - ▶ Secure latch locking system with padlock compatibility
 - ▶ Durable construction with a total weight of 4,87 kg



- P-91051**
Low Profile Medium Organiser - 8,4 L
- ▶ Slim and space-saving design with dimensions of 387 × 596 × 85 mm
 - ▶ Clear lid for easy overview with ribbed design that secures bins in place
 - ▶ Secure latch locking system with padlock compatibility
 - ▶ Lightweight build at just 2,89 kg



- P-91067**
Deep Compact Organiser - 8,55 L
- ▶ Ultra-compact format with dimensions of 278 × 389 × 162 mm
 - ▶ Clear lid for easy overview with ribbed design that secures bins in place
 - ▶ Secure latch locking system with padlock compatibility
 - ▶ Easy to carry with a weight of only 2,59 kg

Interlocking Cases
and Transportation



821549-5
MAKPAC 1 interlock case
395 x 295 x 105 mm



821550-0
MAKPAC 2 interlock case
395 x 295 x 155 mm



821551-8
MAKPAC 3 interlock case
395 x 295 x 215 mm



821552-6
MAKPAC 4 interlock case
395 x 295 x 315 mm




TR00000001
MAKPAC trolley



XGT
ML007G

40V Max - XGT L.E.D. Flashlight / Spotlight



- 4-mode operation: delivering 600 lumens on Spot, 1.000 lumens on Flood, 1.200 lumens on Spot/Flood and Strobe mode

ML007G without batteries and charger



XGT
ML012G

40V Max - XGT L.E.D. Bar Light



- The LED light bar section folds in half for double-sided illumination and compact storage or transport

ML012G without batteries and charger



Check video



XGT
191J85-8

2,5 Ah

40V Max - XGT Power Source Kit

- 2x XGT 2,5 Ah batteries BL4025
- XGT rapid charger DC40RA with dual-fan design circulates air through the battery to cool the battery and circuit board quickly for faster charging
- Charges a 40V Max - XGT 2,5 Ah battery in 28 minutes
- MAKPAC 1 interlock case



XGT
191U20-2

5,0 Ah

40V Max - XGT Power Source Kit

- 2x XGT 5,0 Ah batteries BL4050F
- XGT dual port rapid charger DC40RB with three fan design circulates air through the battery to cool the battery and circuit board quickly for faster charging
- Charges two 40V Max - XGT 5,0 Ah batteries in 50 minutes
- MAKPAC 3 interlock case



LXT
198095-6

6,0 Ah

18V - LXT Power Source Kit

- 4x LXT 6,0 Ah batteries BL1860B
- LXT dual port rapid charger DC18RD with two fan design circulates air through the battery to cool the battery and circuit board quickly for faster charging
- Charges two 18V - LXT 6,0 Ah batteries in 55 minutes
- MAKPAC 3 interlock case



Check video



LXT
DML814

18V - LXT L.E.D. Worklight



- 4-mode operation: delivering 600 lumens on Spot, 1.000 lumens on Flood, 1.250 lumens on Spot/Flood and Strobe mode

DML814 without batteries and charger



Check video



LXT
DML818

18V - LXT L.E.D. Bar Light



- The LED light bar section folds in half for double-sided illumination and compact storage or transport

DML818 without batteries and charger

CHARGE XGT & LXT BATTERIES

Use adapter ADP10 with XGT chargers to rapid charge the 18V LXT batteries



ADP10 (191C10-7)

18V LXT Adapter for XGT Chargers

- Adapts 40 V max XGT chargers to charge 18V LXT batteries
- Charges an 18 V LXT 6,0 Ah battery in only 40 minutes



GOING BEYOND
LIMITS

40 V | 80 V max





MAKITAUK.COM



*Accessories shown are not necessarily supplied as standard equipment.
Specification shown may change owing to our policy of constant improvement.
Subject to availability. E&OE.*